


Waterproof

1m depth for 30 minutes

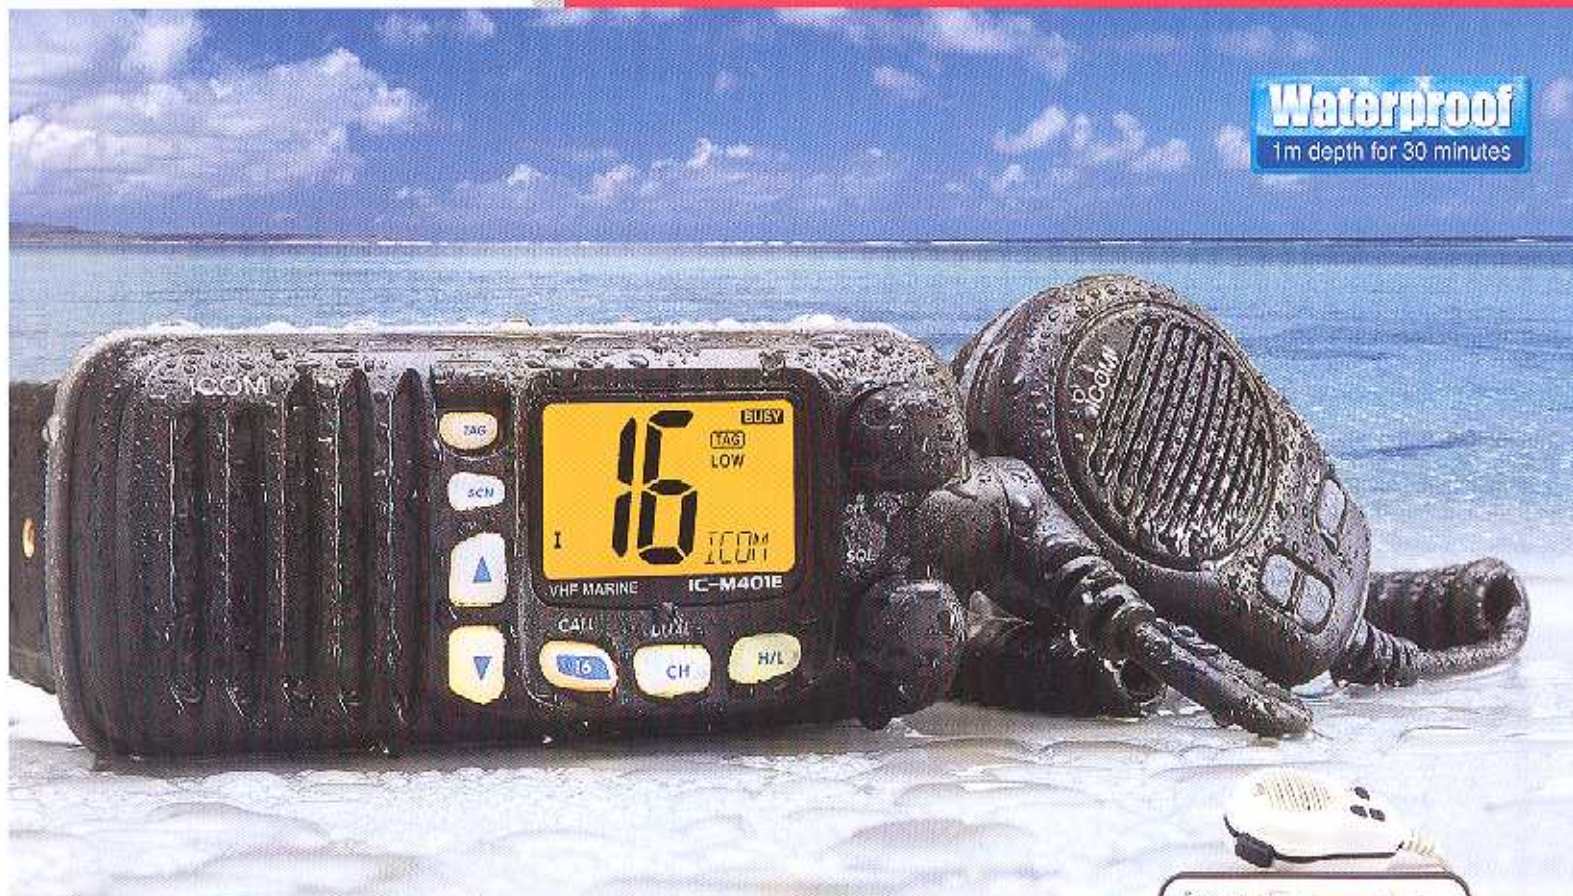


White Color Version

Easy to See! Easy to Hear!

Large LCD (27 x 43mm)

A large LCD is incorporated into the design allowing easy viewing of the large channel display and the scrolling 10-character channel name system—even in direct sunlight, or when water has splashed on the screen. In addition, the 4 step amber backlighting for the LCD and switch illumination, allows the set to be seen in low light conditions.



The photo shows actual display size.

Compact Front Panel

The IC-M401E has a flush mount body and compact front panel making it ideal for installation in a steering panel or bulkhead. The front panel design is well organized and contains well-labeled switches and controls providing simple operation even in the roughest weather conditions.

Waterproof Protection

The IC-M401E, including the microphone and the optional DS-100 have waterproof protection, equivalent to JIS waterproof specification grade 7*.

* 1m depth for 30 minutes, except cables.

Superior Audio with Large Speaker

The speaker's high sound pressure level delivers loud and clear reception, even over background noise. The microphone is tuned to pick up voice, while reducing ambient noise.

Optional ITU Class-D DSC Controller, DS-100

If you are really concerned about DSC operation not only for "Distress" situations, but also for private ship-to-ship calls, a clear display and functional controls are very important. The DS-100 has a 168-character display that shows full dot-matrix characters with clarity. Large, clearly labeled controls allow you to easily make routine individual, group and all ships calls. Up to 40 received messages (20 distress and 20 other calls) are stored and a total 70 address ID's (individual and Group ID) can be programmed.

And More

- Dual and tri-watch functions for monitoring Ch.16 and/or another channel, while receiving on another channel
- Supplied remote function microphone for convenient channel selection
- Up to 22 programmable channels
- Simple and easy tag scanning system
- Black or white color variations

SPECIFICATIONS

GENERAL

- Frequency range : Tx 156.000–161.450MHz*
Rx 156.000–163.425MHz*
- * Frequency range that may be subject to licensing conditions.
- Type of emission : 16K0G3F (FM), 18K0G3R (SSB)
- Usable channels : INT, USA* channels
* Available depending on version.
- Power supply : 13.8V DC $\pm 3\%$
- Current drain (at 13.8V DC):
Tx high 5.5A max.
Max. audio 1.5A max.
- Operating temp. range : -20°C to +60°C
- Frequency stability : ± 1.5 kHz (-20°C to +60°C)
- Antenna connector : SO-239 (50 Ω)
- Dimensions : 153(W) \times 67(H) \times 141.8(D) mm
(projections not included)
- Weight (approx.) : 950g

TRANSMITTER

- Output power : 25W/1W (at 13.8V DC)
- Modulation system : Variable reactance phase mod.
- Max. Freq. deviation : ± 5.0 kHz
- Spurious emissions : Less than 0.25 μ W
- Adjacent Ch. power : More than 70dB
- Residual modulation : More than 40dB


RECEIVER

- Intermediate freq. : 1st 21.7MHz
2nd 450kHz
- Sensitivity : -2dB μ emf typical
at 20dB SINAD
- Squelch sensitivity : Less than 0dB μ emf
- Intermod. rejection : More than 88dB
- Spurious response : More than 70dB
- Adj. Ch. selectivity : More than 70dB
- Audio output power : 1W at 10% distortion with a 4 Ω load

Supplied accessories:

- Hand microphone
- DC power cable
- Mounting bracket kit
- Spare fuses

Measurements made in accordance with EN 301 025.
All stated specifications are subject to change without notice or obligation.

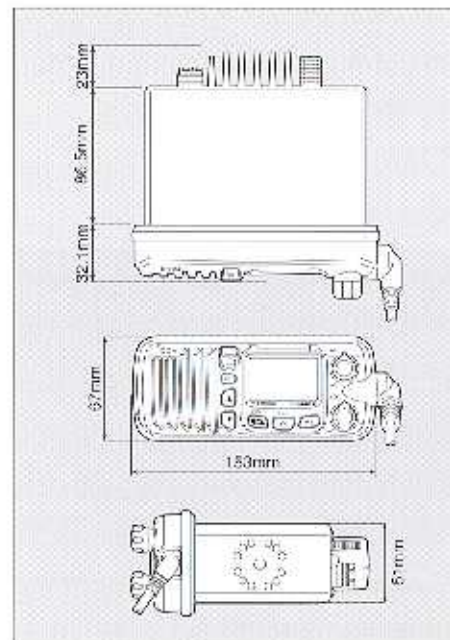

OPTIONS



DS-100

• DS-100 DSC CONTROLLER UNIT (Ver. 02)

- Receive frequency : 156.525MHz (Ch. 70)
- Type of modulation : 18K0G3R (DSC)
- Operating temp. range : -20°C to +60°C
- Antenna connector : SO-239 (50 Ω)
- Dimensions (proj. not incl.) : 165(W) \times 110(H) \times 84.4(D) mm
- Weight (approx.) : 1.0kg
- Sensitivity : -110dB μ typical
- Adjacent Ch. selectivity : 70dB
- Spurious response : 70dB
- Intermod. rejection ratio : 68dB
- GPS interface : NMEA0183 ver. 2.0

Specifications for DS-100 are measured in accordance with EN 301 025.

• MB-75

FLUSH MOUNT KIT

For flush-mounting the DS-100 to a flat surface such as an instrument control panel.



MB-75

• MB-69

FLUSH MOUNT KIT

For flush-mounting the IC-M401E to a flat surface such as an instrument control panel.



MB-69

• MB-92

DUST COVER

Protects the IC-M401E from dust and strong sunlight when the radio is not in use. Available in white only.



• SP-5

EXTERNAL SPEAKER

A large speaker for superior audio output.

• SP-10 EXTERNAL SPEAKER

A compact speaker, for use in limited spaces.



Icom Inc. 1-1-32, Kamiyamari, Hiratsuka-City, Saitama 347-0003, Japan Phone: +81 (05) 8793 5302 Fax: +81 (05) 8793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.
2390 116th Avenue N.E., Bellevue,
WA 98004, U.S.A.
Phone: +1 (425) 484-1155
Fax: +1 (425) 484-1503
E-mail: usa@icominc.com
URL: <http://www.icominc.com>
Customer Service Phone: +1 (800) 421-9810

Icom Canada
Blainville Centre, 2150-9165 Highway 17,
Deltà, B.C. V4K 5S6, Canada
Phone: +1 (604) 932-4297
Fax: +1 (604) 932-4331
E-mail: can@icomcanada.com
URL: <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.
A/118 Waterloo Road,
200 Park Street, Brisbane,
Queensland, Australia
Phone: +61 (0)7 9387 3500
Fax: +61 (0)7 9387 3532
E-mail: austr@icom.com.au
URL: <http://www.icom.net.au>

Icom New Zealand
149A, Irons Road, East Tamaki,
Auckland, New Zealand
Phone: +64 (0)9 274 4092
Fax: +64 (0)9 274 4739
E-mail: nz@icom.co.nz
URL: <http://www.icom.co.nz>

Icom (Europe) GmbH
Communications Equipment
Linnstraße 220, Str. 100,
D-40625 Düsseldorf, Germany
Phone: +49 (0)21 1 548047
Fax: +49 (0)21 1 528939
E-mail: info@icom-europe.com
URL: <http://www.icom-europe.com>

Icom Spain S.L.
C/da. de Soria e Mallorca 14, 750,
09199 San Lluís de Villanueva, Spain
Phone: +34 (0)9 240 28 73
Fax: +34 (0)9 240 28 43
E-mail: span@icom.com
URL: <http://www.icom.com>

Icom (UK) Ltd.
Unit 5, Sea 3L, Hawk Bay,
Bart, C16 8LD, UK
Phone: +44 (0)227 741241
Fax: +44 (0)227 741242
E-mail: uk@icom.co.uk
URL: <http://www.icom.co.uk>

Icom France S.a
Zac de la Plaine, 1
Rue de la Croix des Vieilles (UR) 9374,
93100 La Courneuve, France
Phone: +33 (0)1 39 09 09
Fax: +33 (0)1 39 09 09
E-mail: icom@icomfrance.com
URL: <http://www.icomfrance.com>

Icom Polska
Sopot, 3, ul. 54, Poland
Phone: +48 (0)58 551 7150
Fax: +48 (0)58 551 0484
E-mail: kom@ikom.pl
URL: <http://www.icom.com>

Asia Icom Inc.
61, Koo-Ce, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, T-100
Phone: +886 (0)2 2655 1914
Fax: +886 (0)2 2655 1874
E-mail: asia@icom.com
URL: <http://www.asia-icom.com>

Beijing Icom Ltd.
1025, Wansheng Plaza, Shuangshan Road,
Beijing, China
Phone: +86 (0)10 6866 3112
Fax: +86 (0)10 6866 3553
E-mail: bj@icom91.com
URL: <http://www.icom.com>



Your local distributor/dealer: